




DN20 V2

This practical adapter kit contains DILO DN20 transition pieces for the most commonly used SF₆ gas compartment connections. The self-sealing couplings ensure that no SF₆ is released into the atmosphere during coupling and uncoupling.

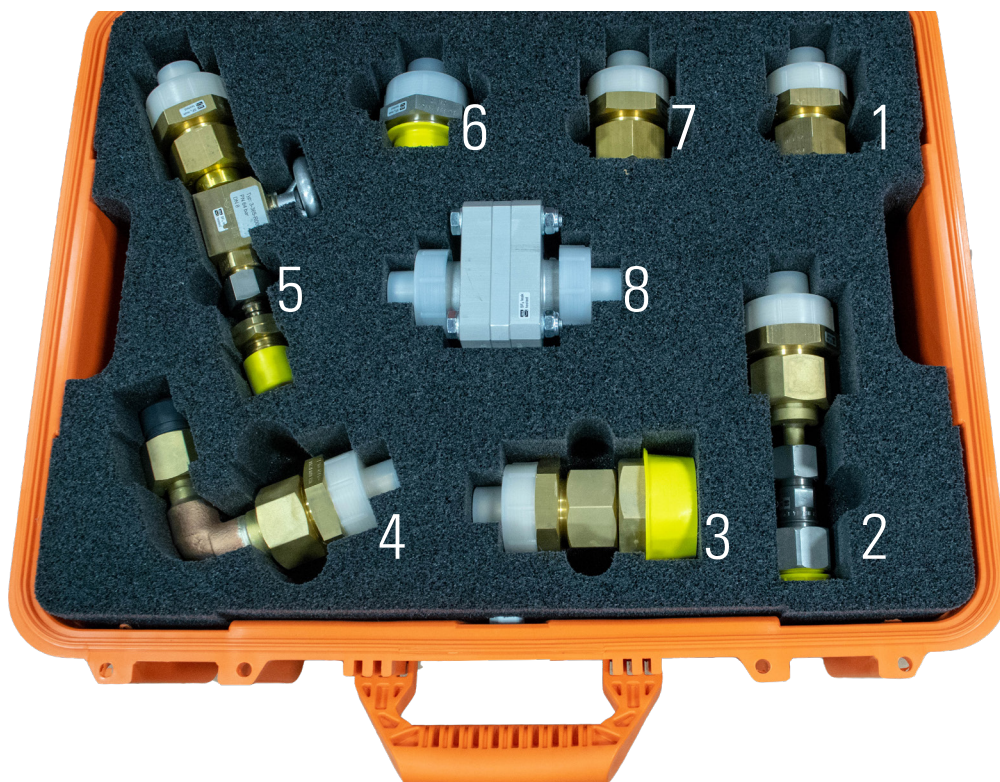

Technical Data:

Case dimensions:	20.66" L x 17.20" W x 8.40" D (525 x 437 x 213 mm)
Case weight:	27 lbs (12.3 kgs)
Shipping dimensions and weight:	21" L x 9" W x 17" H (534 x 229 x 432 mm) / 28 lbs (12.7 kg)

Fittings Included in Kit:

1	VK/A-02/20-3-1037-R002	DN20 self-sealing male to 3/8" FNPT adapter
2	6-1092-R007	DN20 self-sealing male to DN8 self-sealing female adapter
3	6-1027-R001	Adapter VK/A-02/20 to 1 1/4" female JIC flare
4	3-893-R006	Adapter fitting DN20 self-sealing male with 90 degree bend to Malmquist
5	VK/BG-03/20-CGA590	Adapter DN20 male to CGA590 with ball valve
6	3-401-R002 1.4305	Coupling groove part DN20 to 1" MNPT in stainless steel
7	VK/A-02/20-3-1037-R001	DN20 self-sealing male to 1/4" FNPT adapter
8	6-1059-R011 AL	DN20 Hose Union (DN20 self-sealing male to DN20 self-sealing male in aluminum)