


DN8 TESTING AND FILLING

This practical testing and filling adapter kit includes self-sealing couplings to fit most breakers and all DILO measuring devices. The testing and filling kit ensures that no SF_6 is released into the atmosphere during coupling and uncoupling. An SF_6 regulator with a stainless steel internal diaphragm is also included in the kit.

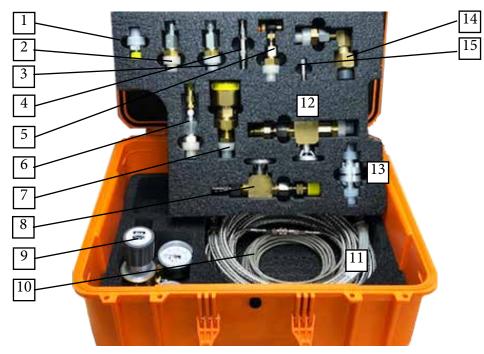

Technical data:

Case dimensions: 20.66" L x 17.20" W x 8.40" D (52.5 x 43.7 x 21.3 cm) Case weight: 34 lbs (15.4 kg) Shipping dimensions and weight: 21" L x 9" W x 17" H (53.4 x 22.9 x 43.2 cm) / 28 lbs (12.7 kg)

Picture #:	Part Number:	Description:
1	3-400-R002 E	Coupling-groove part DN 08 to 3/8" MNPT in stainless steel
2	VK/BG-02/8 H – 3/8"FJIC	Adapter- DN8 male to 3/8" female JIC (flare)
3	VK/BG-02/8 H-¼"FJIC	DILO adapter DN8 self-sealing male to ¼" JIC female
4	3-969-R003	Type 21 male quick-disconnect x Type 21 male quick-disconnect
5	6-1155-R010	DILO DN8 self-sealing male (M26x1.5) to female Schrader valve
6	VK/BG-02/8 H-SP	Adapter DN8 male self-sealing to 3/8" JIC male Siemens SP breaker (Aeroquip)
7	6-1206-R001	DILO DN20 female (VK-F) to DN8 male (VK/A)
8	05-1358-R010 CGA590	Type 21 female quick disconnect to CGA590 ball valve
9	05-1881-R013	$\mathrm{SF}_{\!_{\mathrm{6}}}$ regulator with stainless steel diaphragm with CGA590, DILO DN8 male, and pressure gauge
10	3-531-R060	6m/ 20' long wire-braided hose (teflon lined) with self-sealing QD type 21 fittings (05-1358)
11	6-1130-R050	5m/ 15' DN8 wire-braided hose with self-sealing DILO fittings (VK/F-02/8 P)
12	VK/BG-03/8 H-CGA590	DILO adapter DN8 male to CGA590 nipple
13	6-1059-R012	DN8 hose union (DN8 self-sealing male to DN8 self-sealing male in aluminum)
14	3-893-R005	Adapter fitting DN8 self-sealing male w/ 90 degree bend to Malmquist
15	SV-Extension 39-315-4	1/14" chrome Schrader valve extension